



**SPARCO HARNESS BAR  
2002-2004 SUBARU IMPREZA  
PART # 30017**

**DISCLAIMER**

Motorsports are dangerous. No warranty or representation is made as to product's ability to protect the user from any injury or death; the user assumes that risk. Sparco Motor Sports' products are legal in all 50 states for use on racing vehicles which may never be used on a highway. Not applicable or intended for street or highway use.

**INSTALLATION**

1. Assemble the harness support rods as shown below using the provided heim joints and nuts. Leave at least  $\frac{1}{4}$ " of thread showing on each heim joint to allow for adjustment during installation. Do not fully tighten the nuts at this time. **NOTE: The smaller heim joint has reverse thread.**




2. On both sides of the vehicle's interior, remove the plastic upper seat belt bolt cover and remove the upper bolt as shown here. The factory lock washer needs to be removed so the factory bolt can be completely removed from the upper mount. Remove the plastic lower B-pillar cover and pull the carpet kit away to expose the lower seat belt anchor point. Remove the lower seat belt bolt and spacer. **NOTE: The spacer will be reused in step 5.**



- Cut the carpet to allow clearance for the support rod mounting bolt as shown here.



- Assemble the mounting hardware for the upper harness bar anchor point as follows and bolt the harness bar into the vehicle (do not fully tighten at this time).

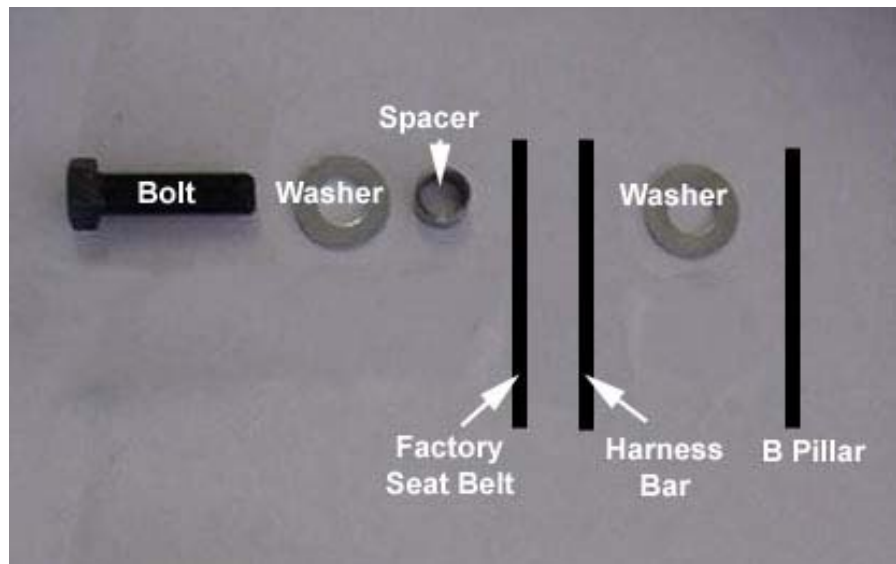

- Connect the lower support rod mounts to the lower factory seat belt locations using the supplied hardware as well as the factory spacer as shown below.



6. Connect the upper support rod mounts to the harness bar using the supplied hardware as shown here.



7. Check for proper installation and adjust as necessary. Tighten all bolts and nuts. The finished installation should look like this:

